



## Mecanismo de empotrar TV + SAT, gris

Mecanismo de empotrar con 2 tomas, 1 TV + 1 SAT, color gris.



### ESPECIFICACIONES

Alimentación	AC220V
Tensión de funcionamiento	AC210-250V
Color	gris
Interior-exterior	Interior
Protección IP	IP13
Temp. de trabajo	-30 +70
Etiqueta energética	A++

#### Referencia

LD1210170

#### Dimensiones del producto

80x80x40mm

#### Dimensiones del packaging

10x10x5cm

#### Certificados

CE  
ROHS  
ECORAEE

### DETALLES

Mecanismos electrónicos de alta calidad y un diseño minimalista que le da una apariencia elegante y estilo refinado.

Toda la gama de **mecanismos táctiles** han sido diseñadas para montarse con gran facilidad pudiendo montar los paneles de cristal sobre los mecanismos

empotrables con un solo click.

\*Panel frontal de cristal se vende por separado

#### Características técnicas:

- Tipo de mecanismo: TV + SAT
- Dimensiones: 80mm\*80mm EU standard
- Certificación: CE,ROHS

## ESQUEMA DE INSTALACIÓN



## Instalacion

The wiring diagram of Satellite Socket



1. Strip off 15mm of the outside of coaxial cable, and turn back the wire net.



2. Strip off 12mm of the middle insulation of the wire and comb it inside the clamping ring.




3. Insert the wire joint into braided wire and insulation material. Then clamp them with pliers.



4. At last, screw the wired plug into Satellite socket accessory.

## GALERIA

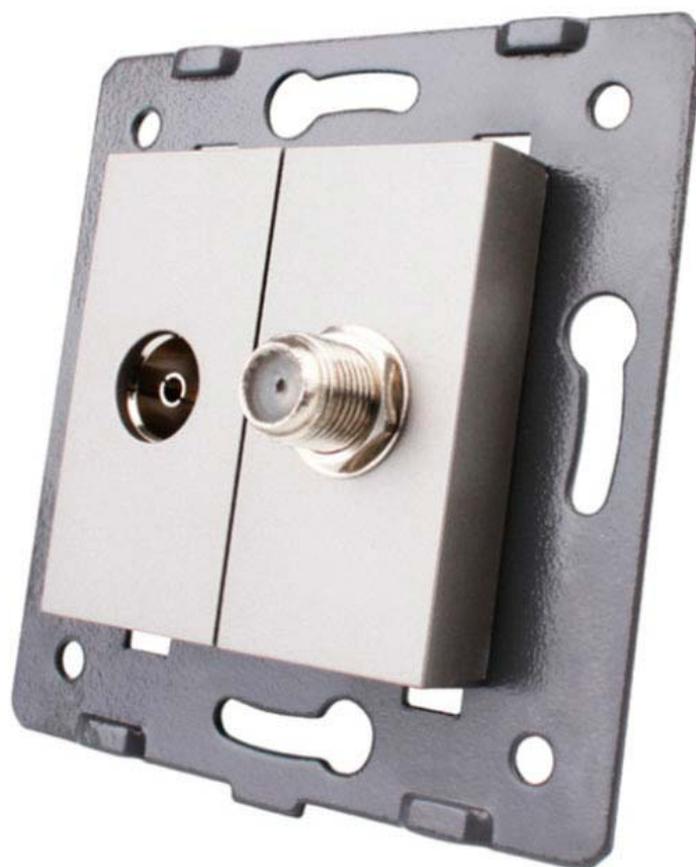

### AVISO

Datos sujetos a cambios sin aviso. Excepto errores y omisiones. Asegúrese de utilizar el archivo más reciente posible.